

# 9700



9700  
with backlit  
high topper

Triton's 9700 Series ATMs are the perfect low-cost solution for today's retail ATM market. These sleek, new machines offer legendary Triton reliability and a host of standard features that are upgrades on other ATMs—all at an unbeatable price. That's what makes the 9700 the new workhorse of the industry.

You'll have to look long and hard to find a comparable ATM with standard features like an electronic lock, a color LCD screen, a 33.6K modem, and 2MB of memory, EPP (Encrypting PIN Pad) and Triple DES software. Or one that

## *The new workhorse of the ATM market.*

gives you as much flexibility where you need it most, cash capacity. As evidenced by the 9700's multiple mechanism options and ability to hold up to four cassettes.

The 9700 further proves our commitment to compliance by adhering to all existing and proposed Americans with Disabilities Act (ADA) regulations, including private audio transactions. It's another standard feature that means more access for your customers and less worries for you.

**Del-Coin Holding Inc.**

# 9100 IN DETAIL



*The best low cost ATM in the industry, bar none.*

## FEATURES:

- Available in Blue and Bayou Bronze
- Single cassette options:
- 5.7" (145 mm) monochrome or color LCD transaction screen
- 60 mm thermal printer
- 2400 baud modem or 33.6k baud modem
- Manual combination lock or electronic lock
- Dip-style card reader
- Small footprint
- Dimensions
  - 16" wide (405 mm)
  - 16" deep (405 mm)
  - 49" high (1245 mm) without topper
  - 60" high (1524 mm) with topper
- 126 lbs. (57 kg)
- UL 291 Business Hours Service cabinet
- Dial-up communications
- Encrypting PIN Pad (EPP) to comply with international encryption standards, Triple DES compliant
- Backlit graphic topper option
- Triton Connect™ compatible
- Advertising revenue potential:
  - Decal and signage
  - Couponing
  - Transaction screen


## OPERATING SPECS:

- Temperature: 10° - 40° C / 50° - 104° F
- Relative humidity: 20%-80% non-condensing
- Power Consumption:
  - 2.0A @ 115 VAC at 60 Hz
  - 1.0A @ 230 VAC at 50 Hz



9100 with Backlit topper

## ATM INSTALLATION SPACE REQUIREMENTS FOR ADA COMPLIANCE

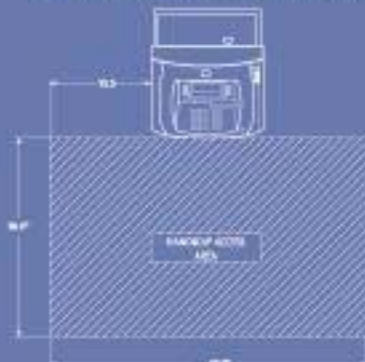

*The dimensions shown comply with US Federal ADA guidelines. For installation within the US, be sure to check state and local guidelines for complete compliance. For non-USA installations, check regulations for the country in which the machine will be installed.*

**Del-Coin Holding Inc.**

Email: [info@del-coin.com](mailto:info@del-coin.com)  
[www.del-coin.com](http://www.del-coin.com)  
705-325-9820